

14+ YEARS experience

Independent Innovation LED Lighting Manufacturer

Responsibility, Honesty, Service and Value.
Listed Company
Quality Defender



Products Catalog

LED TRI-PROOF LIGHT

Parkade EU&AU	04
Parkade US	05
Rancher IP69K	06
Rancher IP66	07
Eco-Rancher IP66	08
Rancher Mini	09
Rancher Eco Mini	10
Gauls	11
Alpha	12
Eco Alpha	13
Eco Mini II	14

LED PANEL LIGHT

Slice Panel Light	15
Intact Panel Light	16
CCT Internal Driver Panel Light	17
Smart Internal Driver LED Panel Light	18
Slim LED Panel Light	19
Back-lit Panel Light	20
Advertising Panel Light	21
Disc Round Panel Light	22
Disc Round Ceiling Light	23

Commercial Lighting

LED Batten Light	24
LED Slimbay Light	25
Single Slimbay Light	26

K-lens Linear Light	27
LED Linear Light	28
LED Linear Light L Lens	29
Mega High Bay	30
Single High Bay	31
Security Light	32
Reflex LED Indirect Light	33
Protac Explosion-proof Light	34

LED TUBE

Expert T8 LED Tube	35
Expert T8 LED Tube(CE)	36
Expert T6 LED Tube	37
T5 Batten Light	38

Outdoor Lighting

UFO High Bay	39
LED Flood Light	40
Arealux Stadium Light	41

Control System

Smart Control System	42
----------------------------	----

Prkade ^{EU&AU} Gage Lights

Linkable / tool-free
Up to 150lm/w
94V0 materials
L80B10=89000hrs
Aluminum casing + PC cover

IP66 IK10



SL-A65X2-20-X

20 Watts 600*94*69mm
130lm/w 2600lm
150lm/w 3000lm



SL-A65X2-30-X

30 Watts 600*94*69mm
130lm/w 3600lm
150lm/w 4500lm



SL-A65X4-40-X

40 Watts 1200*94*69mm
130lm/w 5200lm
150lm/w 6000lm

SL-A65X4-50-X

50 Watts 1200*94*69mm
130lm/w 6500lm
150lm/w 7500lm

SL-A65X5-50-X

50 Watts 1500*94*69mm
130lm/w 6500lm
150lm/w 7500lm

SL-A65X5-60-X

60 Watts 1500*94*69mm
130lm/w 7800lm
150lm/w 9000lm

SL-A65X6-80-X

80 Watts 1800*94*69mm
130lm/w 10400lm
150lm/w 12000lm

SL-A65X8-80-X

80 Watts 2400*94*69mm
130lm/w 10400lm
150lm/w 12000lm

SL-A65X10-100-X

100 Watts 3000*94*69mm
130lm/w 13000lm
150lm/w 15000lm




Prkade US

Vapor Tight Light

DLC 5.1 premium
 94V0 materials
 L80B10-89000hrs
 3/4"/1/2" connector options
 Single/ Linkbale / Rear connection



IP66 IK10



SL-A65X2-20-X

20 Watts 600*94*69mm/2Ft
 130 lm/w 2600lm
 150 lm/w 3000lm

SL-A65X2-30-X

30 Watts 600*94*69mm/2Ft
 130lm/w 3600lm
 150lm/w 4500lm

SL-A65X4-40-X

40 Watts 1200*94*69mm/4Ft
 130lm/w 5200lm
 150lm/w 6000lm

SL-A65X4-50-X

50 Watts 1200*94*69mm/4Ft
 130lm/w 6500lm
 150lm/w 7500lm

SL-A65X4-60-X

60 Watts 1200*94*69mm/4Ft
 130lm/w 7800lm
 150lm/w 9000lm

SL-A65X8-80-X

80 Watts 2400*94*69mm/8Ft
 130lm/w 10400lm
 150lm/w 12000lm

SL-A65X8-100-X

100 Watts 2400*94*69mm/8Ft
 130lm/w 13000lm
 150lm/w 15000lm




Rancher IP69K

LED Poultry Light

Anti-corrosion & Anti-UV
 No water condensation
 S316 Components
 Suitable for outdoor or indoor
 Waterjet clean
 850 °C glow wire test
 L80B10(Ta=25°C)>50,000hrs



IP69K IK10

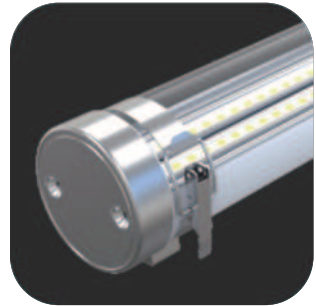

SL-P69X2-20-X PC/PMMA

20 Watts 600*Ø75mm/2Ft
 130/135 lm/w 2600/2700 lm
 145/150 lm/w 2900/3000 lm

SL-P69X2-30-X PC

30 Watts 600*Ø75mm/2Ft
 130 lm/w 3900 lm
 145 lm/w 4350 lm

SL-P69X4-36-X PC/PMMA

36 Watts 1200*Ø75mm/4Ft
 130/135 lm/w 4600/4860 lm
 145/150 lm/w 5220/5400 lm

SL-P69X4-50-X PC

50 Watts 1200*Ø75mm/4Ft
 130 lm/w 6500 lm
 145 lm/w 7250 lm

SL-P69X5-45-X PC/PMMA

45 Watts 1500*Ø75mm/5Ft
 130/135 lm/w 5850/6075 lm
 145/150 lm/w 6525/6750 lm

SL-P69X5-50-X PC

50 Watts 1500*Ø75mm/5Ft
 130 lm/w 6500 lm
 145 lm/w 7250 lm

SL-P69X5-60-X PC

60 Watts 1500*Ø75mm/5Ft
 130 lm/w 7800 lm
 145 lm/w 8700 lm



Eco-Rancher IP69K LED Poultry Light

Anti - yellowing, no dark area, non-cracking
 No water condensation
 S316 Components
 Suitable for Indoor only
 Full PC Housing
 850 °C glow wire test
 L80B10(Ta=25 °C)>50,000hrs



IP69K IK10



SL-P66X2-20-X-C

20 Watts 600*Ø75mm/2Ft
 130 lm/w 2600lm
 145 lm/w 2900 lm



SL-P66X4-36-X-C

36 Watts 1200*Ø75mm/4Ft
 130 lm/w 4680 lm
 145 lm/w 5220 lm



SL-P66X5-45-X-C

45 Watts 1500*Ø75mm/5Ft
 130 lm/w 5850 lm
 145 lm/w 6525 lm



Eco-Rancher IP66 Tri-proof Light

Dial code conversion power
Dial code tone change color temperature
Anti -yellowing / Non-cracking
S316 Components
Linkable, Cost-effective, Tool free

IP69K (IK09)



SL-P66X2-20-X-D

20 Watts 600*Ø75mm
130lm/w 2600lm
140lm/w 2800lm



SL-P66X4-35-X-D

35 Watts 1200*Ø75mm
130lm/w 4550lm
140lm/w 4900lm



SL-P66X5-45-X-D

45 Watts 1500*Ø75mm
130lm/w 5850lm
140lm/w 6300lm

• CCT setting(Optional)

	1	2	
I	ON		3000K
		ON	4000K
III		ON	5000K

• Power setting(Optional)

	4	5	6	
ON	-	-	-	20W
-	-	ON	-	18W
-	ON	-	ON	15W
ON	-	ON	ON	12W

600mm

	3	4	5	6	
ON	-	-	-	-	35W
-	-	ON	-	-	30W
-	ON	-	ON	-	25W
ON	-	ON	ON	ON	20W

1200mm

	3	4	5	6	
ON	-	-	-	-	45W
-	-	ON	-	-	40W
-	ON	-	ON	-	34W
ON	-	ON	ON	ON	27W

1500mm



Rancher-Mini LED Tri-proof Light

Smaller Diameter 40mm
No water condensation
Linkable, S316 components
With Aluminum Rebreather
PC material-UV Resistance
L80B10(Ta=25°C)>50,000hrs



SL-C40F2-10-X

10 Watts 600*Ø40mm/2Ft
120lm/w 1200lm
135lm/w 1350lm



SL-C40F4-20-X

20Watts 1200*Ø40mm/4Ft
120lm/w 2400lm
135lm/w 2700lm



SL-C40F5-30-X

30 Watts 1500*Ø40mm/5Ft
120lm/w 3600lm
135lm/w 4050lm



Rancher Eco-mini Tri-proof

IP66 & IK09 Grading
 Cost-effective
 Innovate installation method
 L80B10(Ta=25°C) > 50,000hrs



SL-C40AF2-10-X-B

10 Watts 600*Ø40mm/2Ft
 120lm/w 1200lm
 135lm/w 1350lm



SL-C40AF4-20-X-B

20Watts 1200*Ø40mm/4Ft
 120lm/w 2400lm
 135lm/w 2700lm



SL-C40AF5-30-X-B

30 Watts 1500*Ø40mm/5Ft
 120lm/w 3600lm
 135lm/w 4050lm



Gauls

IP68 Tubular Light

Chemical / UV resistance
 S304 / S316 Components
 Linkable installation
 L80B10(Ta=25°C)>50,000hrs



IP68

IK10




SL-P68X2-20-X

20 Watts 600*Ø100mm/2Ft
 120lm/w 2400lm
 135lm/w 2700lm



SL-P68X2-30-X

30 Watts 600*Ø100mm/2Ft
 120lm/w 3600lm
 135lm/w 4050lm



SL-P68X4-40-X

40 Watts 1200*Ø100mm/4Ft
 120lm/w 4800lm
 135lm/w 5400lm

SL-P68X4-50-X

50 Watts 1200*Ø100mm/4Ft
 120lm/w 6000lm
 135lm/w 6750lm

SL-P68X5-50-X

50 Watts 1500*Ø100mm/5Ft
 120lm/w 6000lm
 135lm/w 6750lm


SL-P68X5-60-X

60 Watts 1500*Ø100mm/5Ft
 120lm/w 7200lm
 135lm/w 8100lm



Alpha Vapor Tight Light

Full PC housing, S304 clips
 Anti-yellowing / Non-Cracking
 No dark area, No sulfur seal
 L80B10(Ta=25°C)>50,000hrs
 Retrofit to 2x36w, 2x58w fluo fitting

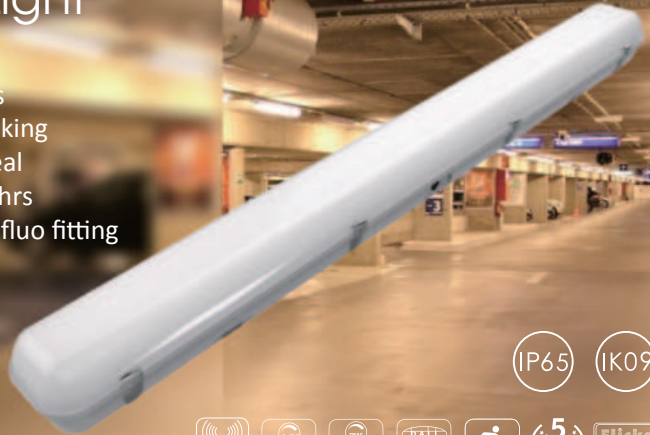

IP65 IK09



SL-P65X4-40-X

40 Watts	1260*120*85mm/4Ft
120lm/w	4800lm
140lm/w	5600lm

SL-P65X5-50-X

50 Watts	1560*120*85mm/5Ft
120lm/w	6000lm
140lm/w	7000lm

SL-P65X4-50-X

50 Watts	1260*120*85mm/4Ft
120lm/w	6000lm
140lm/w	7000lm

SL-P65X5-60-X


60 Watts	1560*120*85mm/5Ft
120lm/w	7200lm
140lm/w	7400lm



Eco Alpha

Vapor Tight Light

Cost-effective
 Full PC housing, S304 clips
 Anti-yellowing / Non-Cracking
 No dark area, No sulfur seal
 Retrofit to 1x36w, 2x36w 2x58w fluo fitting

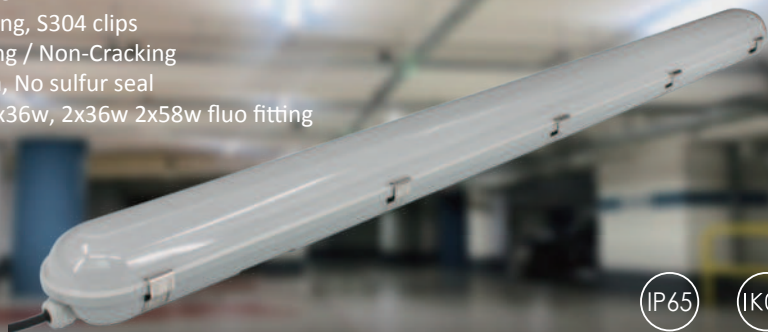

IP65

IK09



SL-P65X4-20-X

20 Watts	1200*70*75mm/4Ft
120lm/w	2400lm
140lm/w	2800lm

SL-P65X5-40-X

40 Watts	1500*70*75mm/5Ft
120lm/w	4800lm
140lm/w	5600lm

SL-P65X4-40-X

40 Watts	1200*70*75mm/4Ft
120lm/w	4800lm
140lm/w	5600lm

SL-P65X5-60-X


60 Watts	1500*70*75mm/5Ft
120lm/w	7200lm
140lm/w	7400lm



EcoMini II

PC Tri-proof Light

Linkable/tool-free
 Anti -yellowing / Non-cracking
 Cost-effective, Linkable, Tool free
 Dial code conversion power
 Dial code tone change color temperature

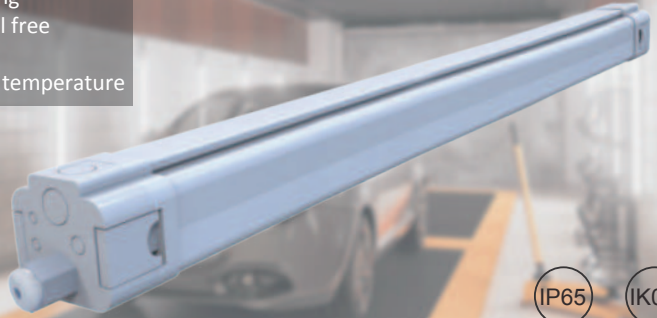


IP65 IK09



SL-M65X2-20-X-D

20 Watts 578*73*70mm
 130lm/w 2600lm
 140lm/w 2800lm

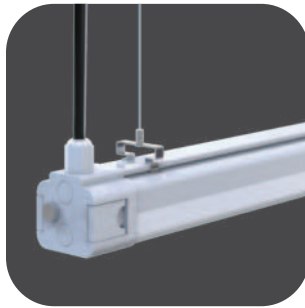

SL-M65X4-35-X-D

35 Watts 1178*73*70mm
 130lm/w 4550lm
 140lm/w 4900lm



SL-M65X5-45-X-D

45 Watts 1478*73*70mm
 130lm/w 5850lm
 140lm/w 6300lm

• CCT setting (Option)

	1	2	
I	ON		3000K
	ON	ON	4000K
III		ON	5000K

• Power setting (Option)

	4	5	6	
ON	-	-	-	20W
-	-	ON	-	18W
-	ON	-	ON	15W
ON	-	ON	ON	12W

578mm

	3	4	5	6	
ON	-	-	-	-	35W
-	-	ON	-	-	30W
-	ON	-	ON	-	25W
ON	-	ON	ON	ON	20W

1178mm

	3	4	5	6	
ON	-	-	-	-	45W
-	-	ON	-	-	40W
-	ON	-	ON	-	34W
ON	-	ON	ON	ON	27W

1478mm



Slice Panel Light

Edge-lit, No dark area
 PMMA LGP, anti-yellowing
 UGR<19 /SDCM<3
 850°C Glow wire Test
 L80B10(Ta=25°C)>50,000hrs



SL-P1112-X-18A

12 Watts 295*295mm
 95lm/w 1140lm

SL-P1125-X-18A

25 Watts 295*295mm
 95lm/w 2375lm

SL-P1440-X-18A

40 Watts
 295*1195mm/302*1211mm
 100lm/w 4000lm
 125lm/w 5000lm

SL-P2240-X-18A

40 Watts
 595*595mm/602*602mm
 100lm/w 4000lm
 125lm/w 5000lm

SL-P2250-X-18A

50 Watts 595*595mm
 100lm/w 5000lm
 125lm/w 6250lm

SL-P2240-X-18A2

40 Watts 620*620mm
 100lm/w 4000lm
 125lm/w 5000lm

SL-P2250-X-A-18A2

50 Watts 620*620mm
 100lm/w 5000lm
 125lm/w 6250lm


SL-P2460-X-18A

60 Watts
 595*1195mm/602*1211mm
 100lm/w 6000lm
 125lm/w 7500lm




Intact Panel Light

23.5mm thickness, Internal driver
 PMMA LGP, Anti-yellowing
 Direct Surface Mounted
 UGR<19 /SDCM<3
 L80B10(Ta=25°C)>50,000hrs



SL-P1120-X-28A

20 Watts 295*295mm/1*1ft
 100lm/w 1800lm



SL-P2240-X-28A

40 Watts 600*600mm/2*2ft
 100lm/w 4000lm
 125lm/w 5000lm

SL-P2240-X-A-28A2

40 Watts 620*620mm/2*2ft
 100lm/w 4000lm
 125lm/w 5000lm


SL-P1440-X-28A

40 Watts 300*1200mm/1*4ft
 100lm/w 4000lm
 125lm/w 5000lm



CCT Internal Driver LED Panel Light

Integrated internal flicker free driver
 Support Triac dimming + Switch 3 CCT adjustment
 Support Wifi+ Bluetooth, Tuya controller
 Efficacy: 100lm/w , Up to 125lm/w
 High-quality Aluminum +PMMA LGP
 Surface mounting without frame




SL-P2240-X-28D

40 Watts 595*595*16mm
 100lm/w 4000lm
 125lm/w 5000lm



SL-P1440-X-28D

40 Watts 295*1195*16mm
 100lm/w 4000lm
 125lm/w 5000lm



SL-P2240-X-28D2

40 Watts 620*620*16mm
 100lm/w 4000lm
 125lm/w 5000lm



Smart Internal Driver LED Panel Light

Instant on/off, edge-lit, no dark area, anti-yellowing

Support On/Off switch 5 CCT adjustment + Ambient light

Support CCT adjustment + RGB Ambient light (Wifi + Bluetooth, APP controller)




IP40

IK06




SL-P2240-X-28E

35+5 Watts 612*612*32mm
100lm/w 4000lm



SL-P1440-X-28E


35+5 Watts 312*1222*32mm
100lm/w 4000lm



SL-P2450-X-28E

45+5 Watts 612*1222*32mm
100lm/w 5000lm



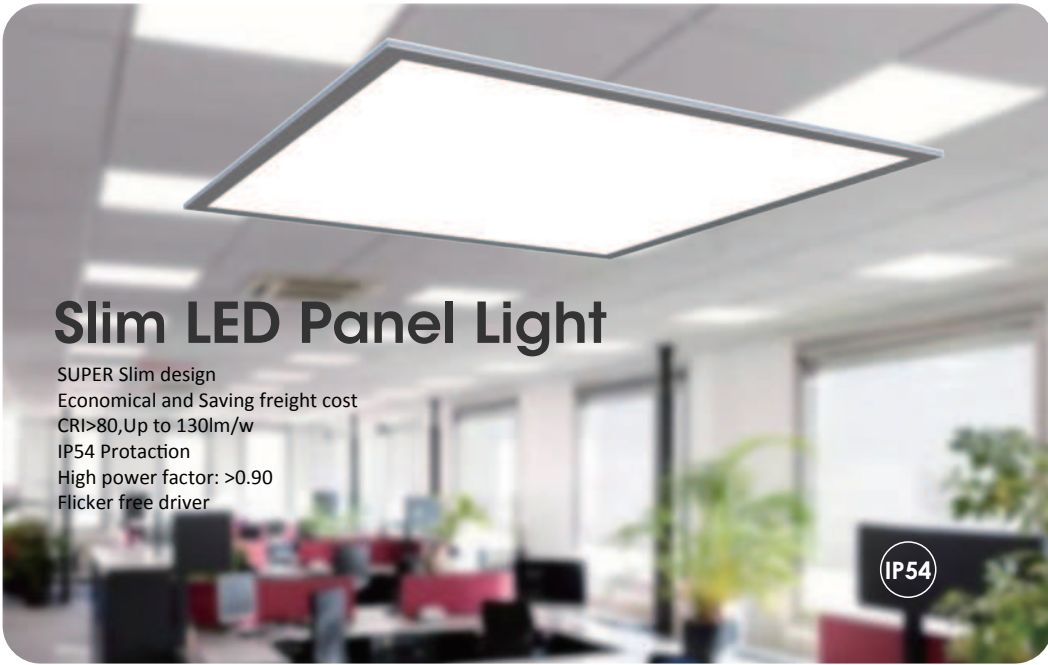


Slim LED Panel Light

SUPER Slim design
 Economical and Saving freight cost
 CRI>80, Up to 130lm/w
 IP54 Protection
 High power factor: >0.90
 Flicker free driver




SL-P1112-X-26B

12 Watts	295*295*7mm
100lm/w	1200lm
120lm/w	1440lm



SL-P1225-X-26B

25 Watts	295*595*7mm
100lm/w	2500lm
120lm/w	3000lm



SL-P2240-X-26B

40 Watts	595*595*7mm
100lm/w	4000lm
130lm/w	5200lm

SL-P2240-X-26B2

40 Watts	620*620*7mm
100lm/w	4000lm
130lm/w	5200lm

SL-P1440-X-26B

40 Watts	295*1195*7mm
100lm/w	4000lm
130lm/w	5200lm

SL-P2460-X-26B

60 Watts	595*1195*7mm
100lm/w	4000lm
130lm/w	7800lm



Backlit LED Panel Light




One-time stretching process

Slim Design, UGR<19

CRI>80, Up to 140lm/w

Material: High-quality Aluminum



SL-P1225-X-38B

30 Watts	295*595*33mm
120lm/w	3600lm
140lm/w	4200lm



SL-P1440-X-38B

40 Watts	295*595*33mm
120lm/w	4800lm
140lm/w	5600lm



SL-P2240-X-38B

40 Watts	595*595*33mm
120lm/w	4800lm
140lm/w	5600lm

SL-P2450-X-38B

50 Watts	1195*595*33mm
120lm/w	6000lm
140lm/w	7000lm



Advertising Panel Light

Lightbox thickness 16mm, ultra thin
 Four-side open, quick replacement for posters
 Customized sizes available
 PMMA LGP high light transmission plate
 100lm/w
 L80B10 Lifespan of 50,000 Hours (@Ta= 25°C)



SL-P1115-X-36A

15 Watts 450*410mm
 100lm/w 1500lm



SL-P2330-X-36A

30 Watts 890*410mm
 100lm/w 3000lm



Disc

Round Panel Light

Ultra thin disc design
PMMA LGP , anti-yellowing
Edge-lit, No dark area



SL-D12005-X 4"

5 Watts	Ø120mm
Cut Size	Ø100mm
70lm/w	350lm



SL-D18010-X 6"

10 Watts	Ø180mm
Cut Size	Ø165mm
80lm/w	800lm



SL-D30020-X 12"

15 Watts	Ø240mm
Cut Size	Ø225mm
80lm/w	1100lm

20 Watts	Ø300mm
Cut Size	Ø285mm
90lm/w	1800lm





Dis Round Ceiling Light

Ultra 38mm slim style fashion Patent design

Aluminum+PMMA cover with white & black color for choice

Flicker free internal driver with Non-dim, Triac and WIFI dimming



SL-RL0810-X(CWW)-BX

Size: Ø203mm (8 inch)

Power: 10W, 830~900lm



SL-RL1215-X(CWW)-BX

Size: Ø305mm (12 inch)

Power: 15W, 1300~1550lm



SL-RL1620-X(CWW)-BX

Size: Ø406mm (16 inch)

Power: 20W, 1650~1800lm





LED Batten Light

IP40, IK09, AL housing + PC cover, anti-yellowing

125lm/w, up to 150lm/w

Flicker free internal driver

Function: Standard / emergency / sensor / dimming

Split structure, easy to install

L80B10 (Ta=25°C) >50,000hrs



SL-BTAX2-10-X

10 watts 600*67*70mm
 125lm/w 1250lm
 150lm/w 1650lm



SL-BTAX4-20-X


20 watts 1200*67*70mm
 125lm/w 2500lm
 150lm/w 3000lm



SL-BTAX5-30-X

30 watts 1500*67*70mm
 125lm/w 3750lm
 150lm/w 4500lm



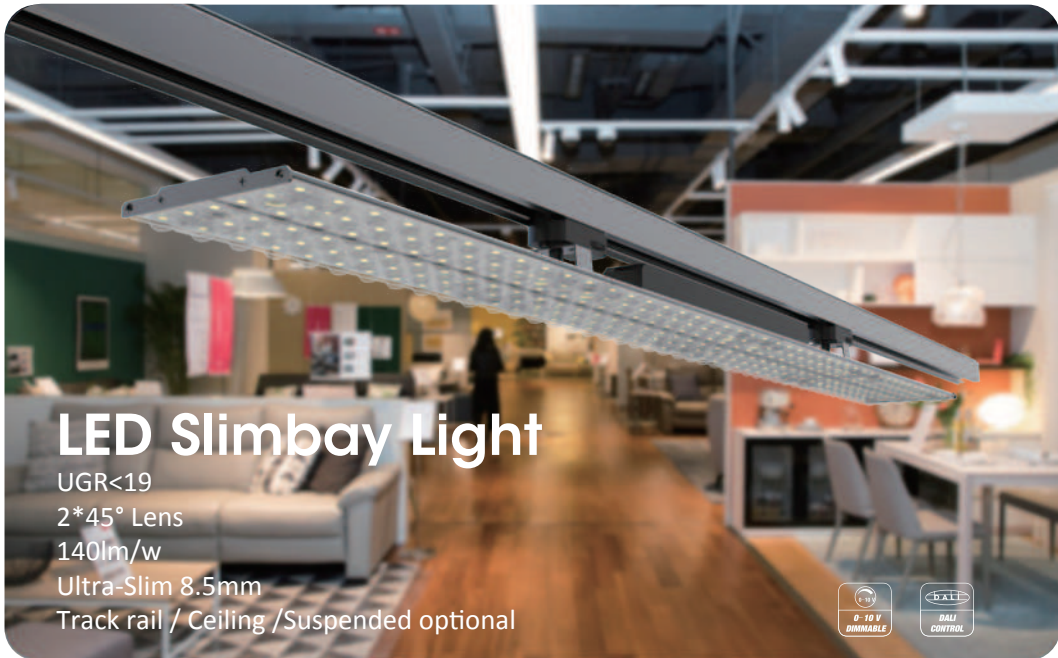

LED Slimbay Light

UGR<19

2*45° Lens

140lm/w

Ultra-Slim 8.5mm


Track rail / Ceiling /Suspended optional



SL-B40X2-40-X

40 Watts
140lm/w

584*125*13mm
5600lm



SL-B40X4-60-X

60 Watts
140lm/w

1164*125*13mm
8400lm




SL-B40X5-75-X

75 Watts
140lm/w

1454*125*13mm
10500lm



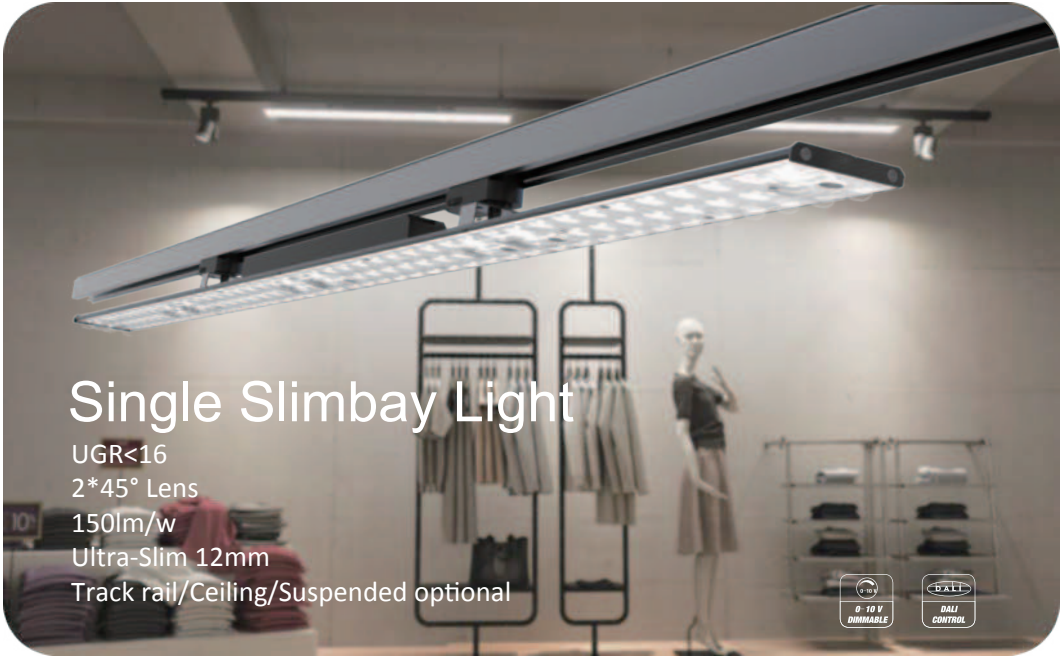

Single Slimbay Light

UGR<16
 2*45° Lens
 150lm/w
 Ultra-Slim 12mm
 Track rail/Ceiling/Suspended optional



SL-B40X2-20-XXB
 20 Watts 585*61*12mm
 150lm/w 3000lm

SL-B40X4-40-XXB
 40 Watts 1165*61*12mm
 150lm/w 6000lm


SL-B40X5-50-XXB
 50 Watts 1455*61*12mm
 150lm/w 7500lm



K-Lens

Linkable Linear Light

Instant-Seamless connection
Replaceable driver easily
Asymmetric & Symmetric lens



SL-A40X2-20-X

20 Watts 584*69*47mm/2Ft
140lm/w 2800lm



SL-A40X4-36-X

36 Watts 1166*69*47mm/4Ft
140lm/w 5000lm



SL-A40X5-45-X


45 Watts 1457*69*47mm/5Ft
140lm/w 6300lm





LED Linear Light

Up & Down emitting
 Split structure, easy to install
 Large beam angle: R=180°/P=120°
 Linkable design, seamless connection

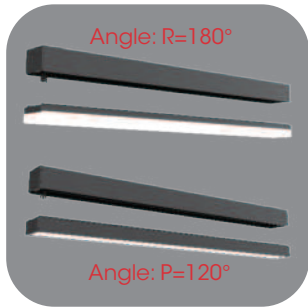

SL-LIAR(P)2-020
 600*80*63mm 2000~2400lm
 Light down: 20Watts
 Light up and down: 6+14Watts

SL-LIAR(P)-030
 900*80*63mm 3000~3600lm
 Light down: 30Watts
 Light up and down: 9+21Watts

SL-LIAR(P)4-040
 1200*80*63mm 4000~4800lm
 Light down: 40Watts
 Light up and down: 12+28Watts

SL-LIAR(P)5-060
 1500*80*63mm 6000~7200lm
 Light down: 60Watts
 Light up and down: 18+42Watts

SL-LIAR(P)6-080
 1800*80*63mm 8000~9600lm
 Light down: 80Watts
 Light up and down: 24+56Watts

SL-LIAR(P)8-100
 2400*80*63mm 10000~12000lm
 Light down: 100Watts
 Light up and down: 30+70Watts



L-Lens Linear Light


Beam angle:

30° /45° /60° /90° /120° /30*110°

60*110° /90*110° /120*120°

Split structure, easy to install

Linkable design, seamless connection

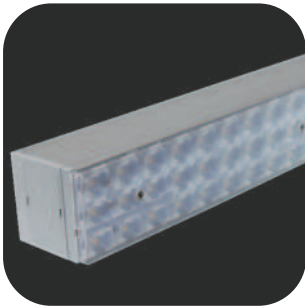

SL-LIAL2-020

20 Watts 600*80*63mm/2Ft
130lm/w 2600-3200lm



Connector

SL-LIAL3-030

30 Watts 900*80*63mm/2Ft
130lm/w 3900-4800lm



SL-LIAL4-040

40 Watts 1200*80*63mm/2Ft
130lm/w 5200-6400lm

SL-LIAL5-060

60 Watts 1500*80*63mm/2Ft
130lm/w 7800-9600lm


SL-LIAL6-080

80 Watts 1800*80*63mm/2Ft
130lm/w 10400-12800lm

SL-LIAL8-100

100 Watts 2400*80*63mm/2Ft
130lm/w 13000-16000lm



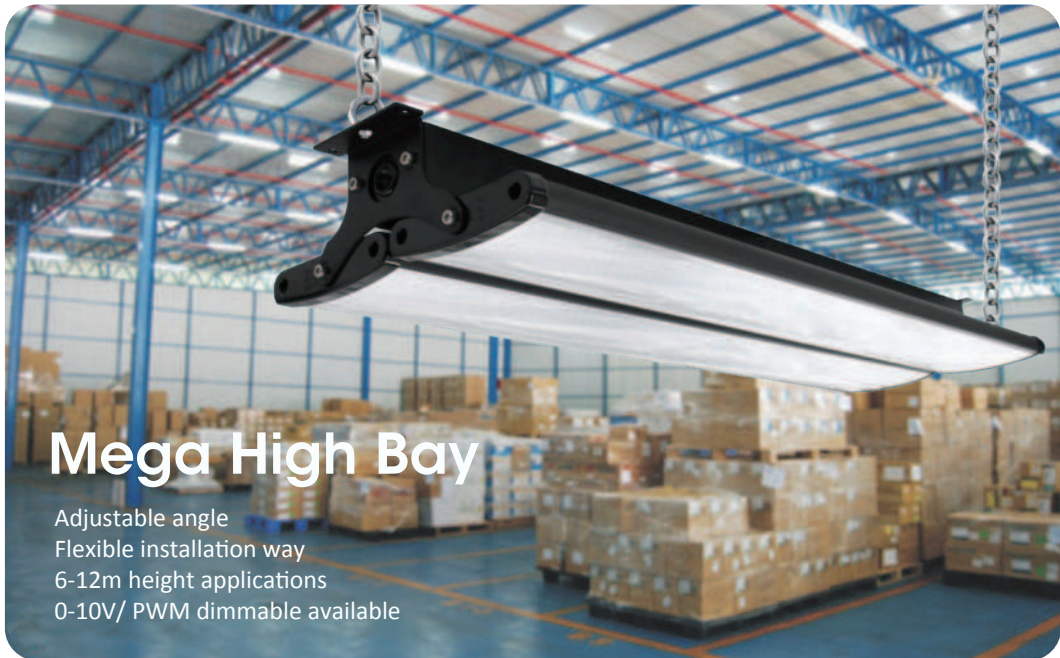

Mega High Bay

Adjustable angle
 Flexible installation way
 6-12m height applications
 0-10V/ PWM dimmable available




SL-MH42X2-100-X

100 Watts	600*289*103mm/2FT
120lm/w	12000lm
150lm/w	15000lm



SL-MH42X3-120-X


150 Watts	900*289*103mm/3FT
120lm/w	15600lm
150lm/w	18000lm



SL-MH42X4-150-X



200 Watts	1200*289*103mm/4FT
120lm/w	18000lm
150lm/w	22500lm



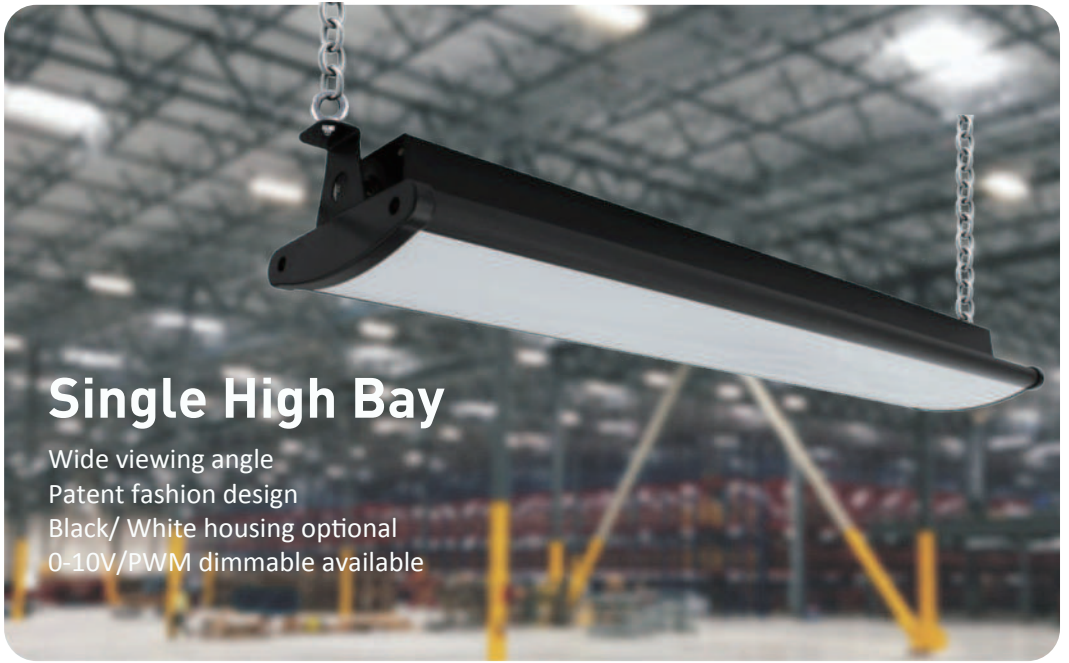

Single High Bay

Wide viewing angle
 Patent fashion design
 Black/ White housing optional
 0-10V/PWM dimmable available



SL-SH42X2-80-X

80 Watts	600*185*96mm/2FT
120lm/w	9600lm
150lm/w	12000lm


SL-SH42X3-120-X

120 Watts	900*185*96mm/3FT
120lm/w	14400lm
150lm/w	18000lm

SL-SH42X4-150-X

150 Watts	1200*185*96mm/4FT
120lm/w	18000lm
150lm/w	22500lm



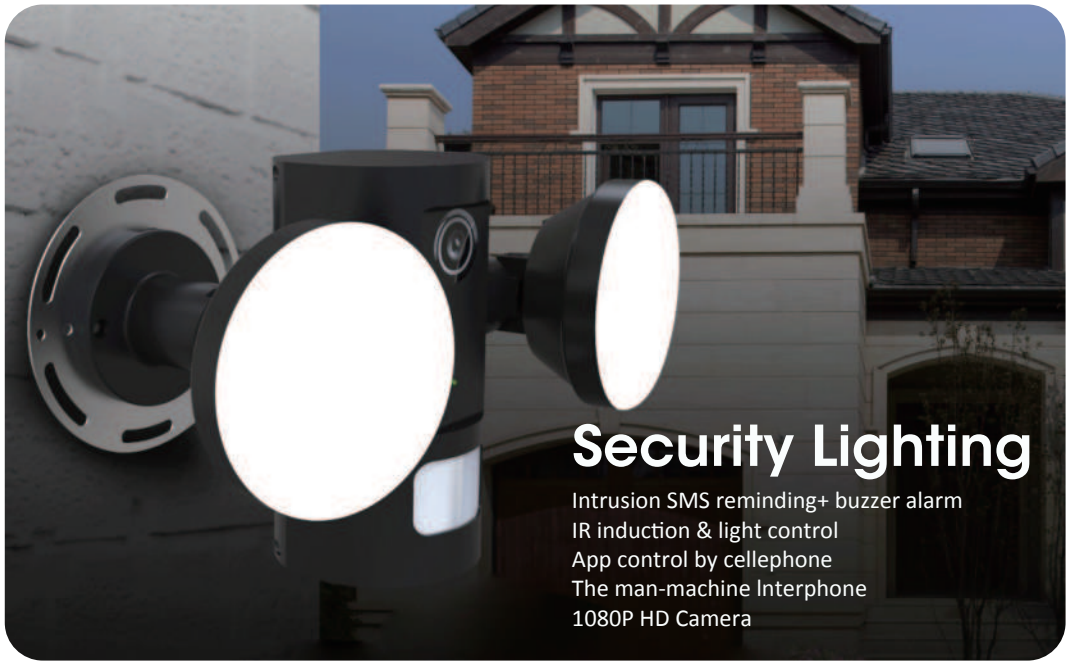

Security Lighting

Intrusion SMS reminding+ buzzer alarm
 IR induction & light control
 App control by cellphone
 The man-machine Interphone
 1080P HD Camera



SL-S1-12-X

12 Watts 200*100*138mm
 100lm/w 1200lm



SL-S2-12-X

12 Watts 200*165*128mm
 100lm/w 1200lm





Reflex LED Indirect Light

Indirect Lighting, No Spot or Glare

UGR<19, No flicker driver

CCT & power tunable

L80B10(Ta=25 C)>50,000hrs



SL-LD70X2-20-X

20 Watts 562*Ø70mm
100lm/w 2000lm



SL-LD70X4-36-X

36 Watts 1118*Ø70mm
100lm/w 3600lm



SL-LD70X5-45-X

45 Watts 1397*Ø70mm
100lm/w 4500lm

■ 562mm

DIP Switch			
Power(±10%)	10W	15W	20W
DIP Switch			
CCT	3000K	4000K	5000K

■ 1118mm

DIP Switch			
Power(±10%)	25W	30W	36W
DIP Switch			
CCT	3000K	4000K	5000K

■ 1397mm

DIP Switch			
Power(±10%)	35W	40W	45W
DIP Switch			
CCT	3000K	4000K	5000K




Protac Explosion-proof Light

ATEX Quick Connector

High-strength PC Dual Color Housing

Endcap: PA66 + Fibreglass

ENEC Certified Flicker Free Driver, THD<15%

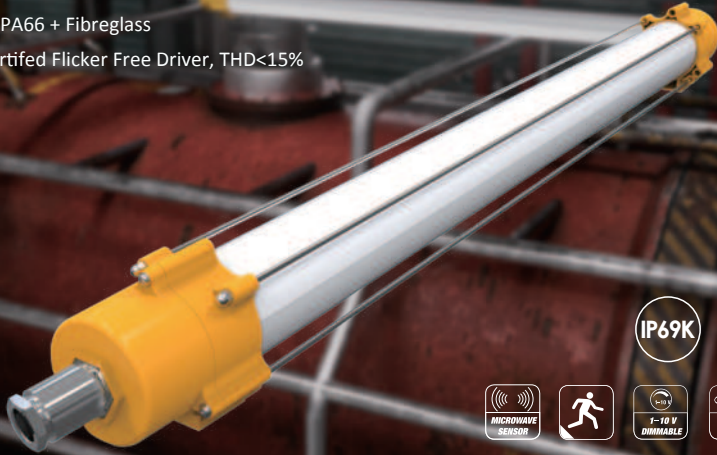

IP69K

IP66

IK10



SL-P69X2-20-YD

20 Watts 600*Ø76mm/2Ft
150lm/w 3000lm



SL-P69X3-30-YD

30 Watts 1200*Ø76mm/3Ft
150lm/w 4500lm



SL-P69X4-36-YD

36 Watts 1500*Ø76mm/4Ft
150lm/w 5400lm



Expert

T8 LED Tube

Auto-recover while incorrect input

Aluminum housing + PC Cover

±90° rotatable end cap

Up to 150lm/w

Magnetic/ Electronical ballast compatible

L80B10(Ta=25°C)>50,000hrs




SLR-T82X10-117-X

10 Watts	600mm
120lm/w	1200lm
150lm/w	1500lm



SLR-T84X18-234-X

18 Watts	1200mm
120lm/w	2160lm
150lm/w	2700lm



SLR-T84X20-234-X

20 Watts	1200mm
120lm/w	2400lm
150lm/w	3000lm

SLR-T85X22-260-X

22 Watts	1500mm
120lm/w	2640lm
150lm/w	3300lm

SLR-T85X25-286-X

25 Watts	1500mm
120lm/w	3000lm
150lm/w	3750lm

SLR-T85X30-312-X

30 Watts	1500mm
120lm/w	3600lm
150lm/w	4500lm



Expert

T8 LED Tube(CE)

Auto-recover while incorrect input
Aluminum housing + PC Cover
±90° rotatable end cap
Up to 160lm/w
Magnetic/ Electronical ballast compatible
L80B10(Ta=25°C)>50,000hrs




SLR-T82X10-108-X(HF)

10 Watts	600mm
130lm/w	1300lm
160lm/w	1600lm



SLR-T84X18-240-X(HF)


18 Watts	1200mm
130lm/w	2300lm
160lm/w	2880lm

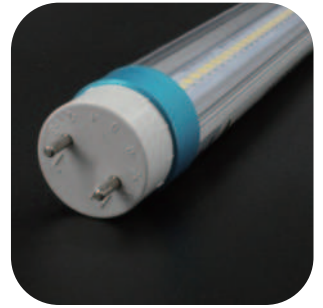

SLR-T85X25-288-X(HF)

25 Watts	1500mm
130lm/w	3250lm
160lm/w	4000lm



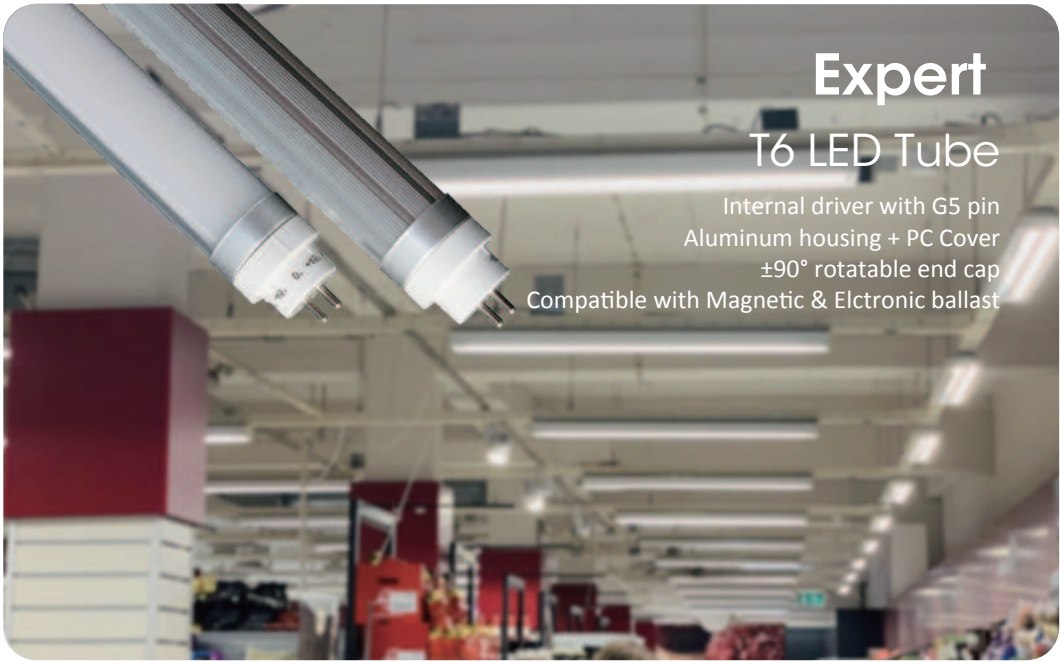

Expert


T6 LED Tube

Internal driver with G5 pin
 Aluminum housing + PC Cover
 ±90° rotatable end cap
 Compatible with Magnetic & Electronic ballast



SL-T62X10-108-X

10 Watts	549*Ø23.5mm
120lm/w	1200lm
150lm/w	1500lm



SL-T65X22-264-X

22 Watts	1449*Ø23.5mm
120lm/w	2640lm
150lm/w	3300lm



SL-T64X20-240-X

20 Watts	1149*Ø23.5mm
120lm/w	2400lm
150lm/w	3000lm

SL-T65X25-288-X

20 Watts	1149*Ø23.5mm
120lm/w	2400lm
150lm/w	3000lm



T5 Integrated LED Tube

Aluminum housing + PC Cover
Integrated structure
Internal drive
Linkable / tool-free



SL-T52X-10-54-XT

10 Watts	60*23mm
120lm/w	1200lm
140lm/w	1400lm



SL-T54X-20-120-XT

20 Watts	120*23mm
120lm/w	2400lm
140lm/w	2800lm



SL-T53X-15-72-XT

15 Watts	90*23mm
120lm/w	1800lm
140lm/w	2100lm



SL-T55X-25-144-XT

25 Watts	150*23mm
120lm/w	3000lm
140lm/w	3500lm




UFO Highbay Light

CE, RoHS certificate
NO UV& IR thermal radiation, Hg-Free
IP65 waterproof, Anti-corrosion
160lm/w±10%, Flicker free driver
High-quality Aluminum housing + Ultra-clear lens
L80B10(Ta=25 °C)>50,000hrs

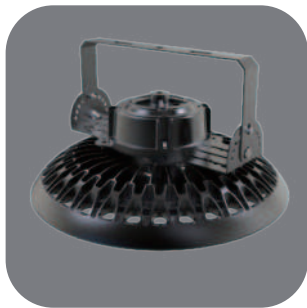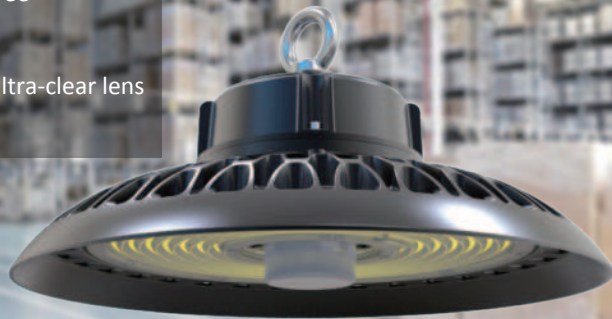

SL-U65BB-60-X(E)

60 Watts Φ 290*H176mm
160lm/w 9600lm




SL-U65BB-100-X(E)

100 Watts Φ 290*H176mm
160lm/w 16000lm



SL-U65BB-120-X(E)

120 Watts Φ 340*H189mm
160lm/w 19200lm




SL-U65BB-150-X(E)

150 Watts Φ 340*H189mm
160lm/w 24000lm



SL-U65BB-200-X(E)

200 Watts Φ 380*H191mm
160lm/w 32000lm



SL-U65BB-240-X(E)

240 Watts Φ 380*H191mm
160lm/w 38400lm



LED Flood Light

IP65, outdoor usage
Tempered glass
Respirator
Up to 140lm/w



SL-F65BD-10-X

10 Watts

120lm/w 1200lm

SL-F65BD-20-X

20 Watts

120lm/w 2400lm

SL-F65BD-30-X

30 Watts

120lm/w 3600lm

SL-F65BD-50-X

50 Watts

130lm/w 6500lm

SL-F65BD-80-X

80 Watts

130lm/w 10400lm

SL-F65BD-100-X

100 Watts

130lm/w 13000lm

SL-F65BD-150-X

150 Watts

130lm/w 19500lm

SL-F65BD-200-X


200 Watts

130lm/w 26000lm



Arealux Stadium Light

IP65 & IK10 Grading
 Thunder&Surge protection
 Strong thermal conductivity
 High heat dissipation efficiency
 Lens angle: 60°/20°
 Customizable lens angles: 90°/40°/30°/10°

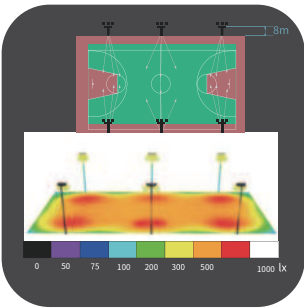


SL-0200-D60

200 Watts

120lm/w

24000lm




SL-0400-D60

400 Watts

120lm/w

48000lm

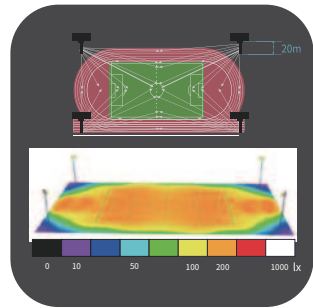

SL-0600-D20

600 Watts

120lm/w

72000lm

SL-0800-D20

800 Watts

120lm/w

96000lm

SL-1200-D20

1200 Watts

120lm/w

144000lm




Smart Control System

Memory function

IP65 rating

Single lamp control or multi-group control
 Dimming & CCT spectrum control for Timing setting
 Support 0-10V, PWM dimming power supply
 Sunrise and sunset lighting mode Simulation

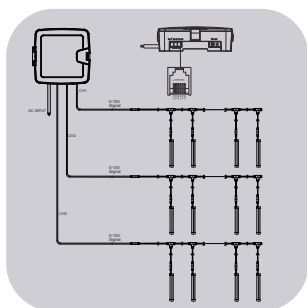

SL-IFC1000

240*240*80mm (9.45*9.45*3.15 inch)

AC100-240V / 0.1-1A

Output Requirement: PWM/0-10V

Standby Power <1Watt







Alpha Vapor Tight



Rancher IP69K Tri-proof

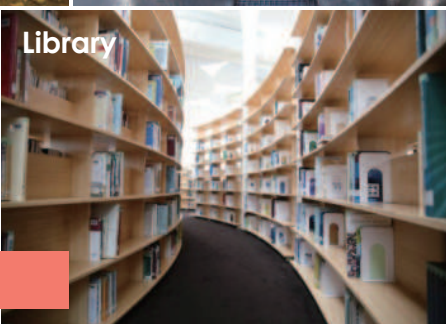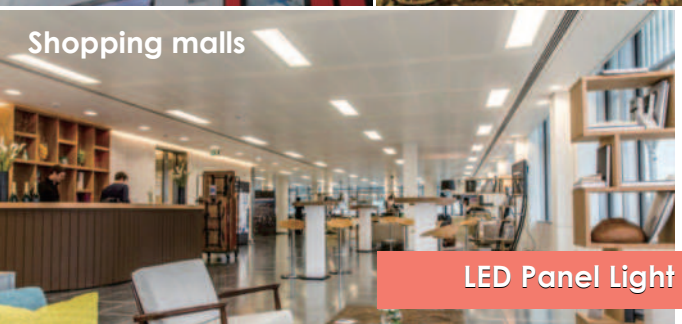

LED Panel Light



LED Tube Light



Quality Defender
Original Designer